

BLADE 295P

TRUCK-MOUNTED AERIAL WORK PLATFORM | PALFINGER P 900



MAX WORKING HEIGHT

295 ft

MAX HORIZONTAL OUTREACH

98 ft

MAX CAGE CAPACITY

1,168 lb

KEY FEATURES

Automatic Levelling Set-Up

Set-up levelling is automatic, with continuous range adjustment compensating for ground slope.

Selectable Outrigger Extension

Outriggers run at 0%, 50% or 100% extension, so the machine still works from restricted footprints.


Dual Stabiliser Modes

Rated working envelopes are published for both 100% and 75% outrigger extension.

BLADE 295P



WORKING ENVELOPE

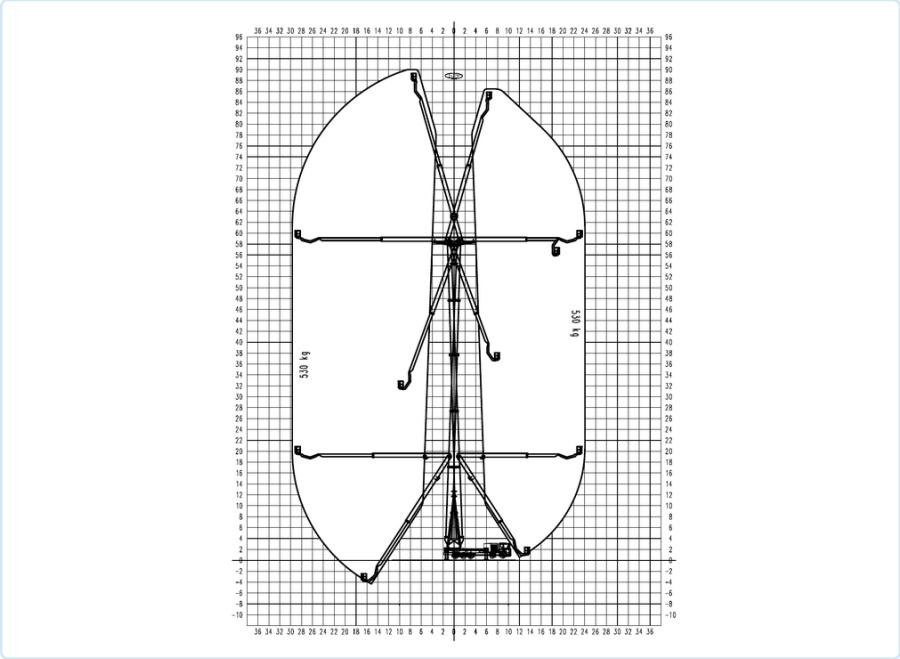

SAFETY FEATURES

AUTO OUTRIGGER SET & LEVELLING

Outriggers deploy, set and level automatically, establishing a stable working base quickly and repeatably.

LOAD-MOMENT LIMITING

Reach is limited in real time against cage load and outrigger position rather than a single fixed envelope.

STABILISED WORK PLATFORM

Rated to the working envelopes published by the manufacturer for each stabiliser configuration.

TECHNICAL SPECIFICATIONS

MAX WORKING HEIGHT 295 ft	MAX HORIZONTAL OUTREACH 98 ft	MAX CAGE CAPACITY 1,168 lb
GROSS VEHICLE WEIGHT 109,100–113,500 lb	BELOW GRADE REACH 23 ft	OUTRIGGER EXTENSION 100 / 75%
OUTREACH @ 75% SPREAD 75 ft		

All information is intended for guidance purposes only and is not a substitute for the manufacturer's specification data. A 2% tolerance is contingent on structural components. Gross vehicle weight depends on truck chassis. Specifications subject to change without notice.



(855) 252-3387
info@bladeplatforms.com
1901 E Hwy 80, Abilene, TX 79601, USA



SCAN TO VISIT