

BLADE 336P

TRUCK-MOUNTED AERIAL WORK PLATFORM | PALFINGER WT 1000



MAX WORKING HEIGHT

336 ft

MAX HORIZONTAL OUTREACH

114 ft

MAX CAGE CAPACITY

1,168 lb

KEY FEATURES

Automatic Levelling Set-Up

Set-up levelling is automatic, with continuous range adjustment compensating for ground slope.

Selectable Outrigger Extension

Outriggers run at 0%, 50% or 100% extension, so the machine still works from restricted footprints.


Largest In The Fleet

336 ft of working height on a Faun all-terrain carrier, set up in under 15 minutes.

BLADE 336P



WORKING ENVELOPE

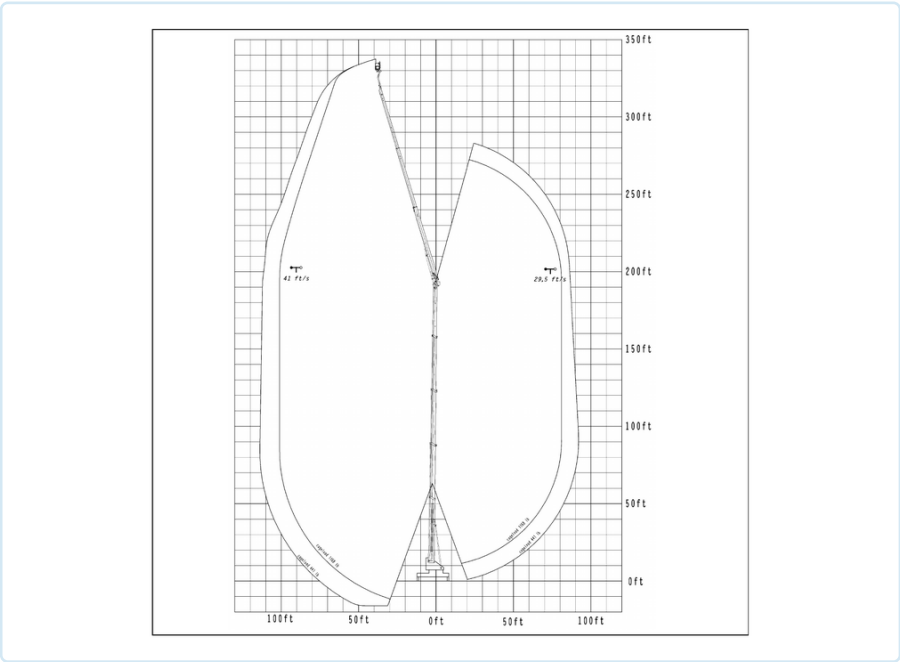

SAFETY FEATURES

AUTO OUTRIGGER SET & LEVELLING

Outriggers deploy, set and level automatically, establishing a stable working base quickly and repeatably.

LOAD-MOMENT LIMITING

Reach is limited in real time against cage load and outrigger position rather than a single fixed envelope.

STABILISED WORK PLATFORM

Rated to the working envelopes published by the manufacturer for each stabiliser configuration.

TECHNICAL SPECIFICATIONS

MAX WORKING HEIGHT 336 ft	MAX HORIZONTAL OUTREACH 114 ft	MAX CAGE CAPACITY 1,168 lb
GROSS VEHICLE WEIGHT 136,700 lb	LENGTH — TRANSPORT 53 ft 2 in	WIDTH — TRANSPORT 9 ft 1 in
HEIGHT — TRANSPORT 13 ft 1 in	CAGE DIMENSIONS 12 ft 8 in × 3 ft 4 in	CHASSIS Faun
MAX SET-UP INCLINATION 0°	OUTREACH @ 441 LB 114 ft	OUTREACH @ 1,168 LB 101 ft
MAX WIND SPEED 28 mph		

All information is intended for guidance purposes only and is not a substitute for the manufacturer's specification data. A 2% tolerance is contingent on structural components. Gross vehicle weight depends on truck chassis. Specifications subject to change without notice.



(855) 252-3387
info@bladeplatforms.com
1901 E Hwy 80, Abilene, TX 79601, USA



SCAN TO VISIT