

BLADE 243P

TRUCK-MOUNTED AERIAL WORK PLATFORM | PALFINGER P 750



MAX WORKING HEIGHT

243 ft

MAX HORIZONTAL OUTREACH

130 ft

MAX CAGE CAPACITY

1,322 lb

KEY FEATURES

Automatic Levelling Set-Up

Set-up levelling is automatic, with continuous range adjustment compensating for ground slope.

Selectable Outrigger Extension

Outriggers run at 0%, 50% or 100% extension, so the machine still works from restricted footprints.


Reduced-Footprint Set-Up

Full 243 ft of height is retained fore and aft even with the outriggers at 50% extension.

BLADE 243P



WORKING ENVELOPE

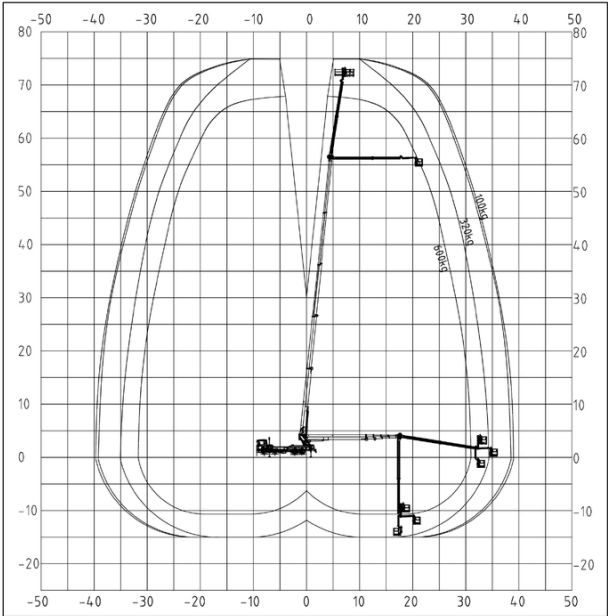

SAFETY FEATURES

AUTO OUTRIGGER SET & LEVELLING

Outriggers deploy, set and level automatically, establishing a stable working base quickly and repeatably.

LOAD-MOMENT LIMITING

Reach is limited in real time against cage load and outrigger position rather than a single fixed envelope.

STABILISED WORK PLATFORM

Rated to the working envelopes published by the manufacturer for each stabiliser configuration.

TECHNICAL SPECIFICATIONS

MAX WORKING HEIGHT 243 ft	MAX HORIZONTAL OUTREACH 130 ft	MAX CAGE CAPACITY 1,322 lb
BELOW GRADE REACH 49 ft	CHASSIS Kenworth	MAX SET-UP INCLINATION 1°
OUTREACH @ 705 LB 114 ft	OUTREACH @ 1,322 LB 103 ft	OUTRIGGER EXTENSION 0 / 50 / 100%

All information is intended for guidance purposes only and is not a substitute for the manufacturer's specification data. A 2% tolerance is contingent on structural components. Gross vehicle weight depends on truck chassis. Specifications subject to change without notice.



(855) 252-3387
info@bladeplatforms.com
1901 E Hwy 80, Abilene, TX 79601, USA



SCAN TO VISIT