

BLADE 157P

TRUCK-MOUNTED AERIAL WORK PLATFORM | PALFINGER P 480



MAX WORKING HEIGHT

157 ft

MAX HORIZONTAL OUTREACH

99 ft

MAX CAGE CAPACITY

1,322 lb

KEY FEATURES

Automatic Levelling Set-Up

Set-up levelling is automatic, with continuous range adjustment compensating for ground slope.

Selectable Outrigger Extension

Outriggers run at 0%, 50% or 100% extension, so the machine still works from restricted footprints.


Bridge Law Legal Transport

Rolls between sites at 64,000 lb on a Freightliner 114SD 6×4 — no oversize load permits required.

BLADE 157P



WORKING ENVELOPE

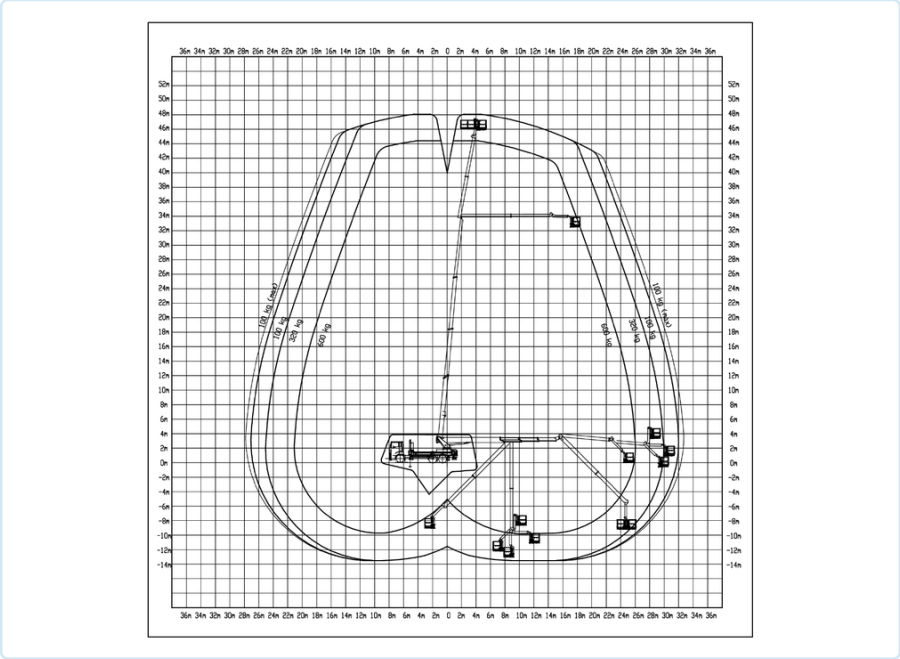

SAFETY FEATURES

AUTO OUTRIGGER SET & LEVELLING

Outriggers deploy, set and level automatically, establishing a stable working base quickly and repeatably.

LOAD-MOMENT LIMITING

Reach is limited in real time against cage load and outrigger position rather than a single fixed envelope.

STABILISED WORK PLATFORM

Rated to the working envelopes published by the manufacturer for each stabiliser configuration.

TECHNICAL SPECIFICATIONS

MAX WORKING HEIGHT 157 ft	MAX HORIZONTAL OUTREACH 99 ft	MAX CAGE CAPACITY 1,322 lb
GROSS VEHICLE WEIGHT 64,000 lb	LENGTH — TRANSPORT 33 ft 0 in	WIDTH — TRANSPORT 8 ft 3 in
HEIGHT — TRANSPORT 13 ft 1 in	CAGE DIMENSIONS 12 ft 6 in × 3 ft 4 in	CHASSIS Freightliner 114SD 6×4
MAX SET-UP INCLINATION 2°	OUTRIGGER EXTENSION 0 / 50 / 100%	

All information is intended for guidance purposes only and is not a substitute for the manufacturer's specification data. A 2% tolerance is contingent on structural components. Gross vehicle weight depends on truck chassis. Specifications subject to change without notice.



(855) 252-3387
info@bladeplatforms.com
1901 E Hwy 80, Abilene, TX 79601, USA



SCAN TO VISIT